ManufacturerContrast LightingModelECO2L2A-01380W

Description 4" LED Downlight, round adjustable trm

Driver Magtech M9-A36-0250 **Nominal Power (W)** 10.7


Dimming Control reverse-phase

Product Range

Test Date 2/16/2015

Dimmer Tested Against:	EDIMMOD	
Pass/Fail	Pass	
Best-Fit Power Profile:		
Minimum ON	4.5	
Maximum ON	85	
Adjust	100	
Light Output Range (vs. non-dimmed)		
Maximum (Perceived)	95.1%	
Minimum (Perceived)	22.8%	
Minimum (Measured)	5.2%	

Linearity Curves (Best-fit Power Profile Applied):

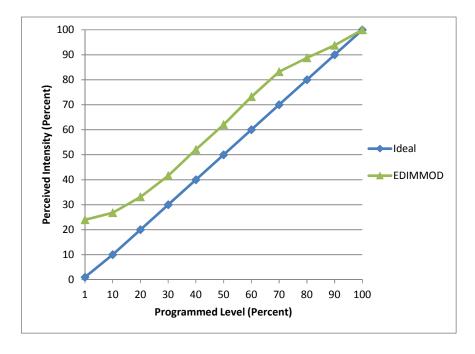

Observations: