
Manufacturer	Elite		
Model	RL430-10W-120V-DIM-FL-30K-W-WH		
Description	4" Retrofit Recessed Downlight Insert		
Driver	Brillia BL26-120-DIM-300 (Integral)		
Nominal Power (W)	10		
Dimming Control	Line-voltage phase control, reverse-phase		
Product Range			
Test Date	6/29/2011		

50% Dim Level Waveform Capture

Dimmer Tested Against:	EDIMMOD	
Pass/Fail	Passs	
Best-Fit Power Profile:		
Minimum ON	1	
Maximum ON	67	
Adjust	100	
Light Output Range (vs. non-dimmed)		
Maximum (Perceived)	95.1%	
Minimum (Perceived)	20.1%	
Minimum (Measured)	4.1%	

Linearity Curves (Best-fit Power Profile Applied):

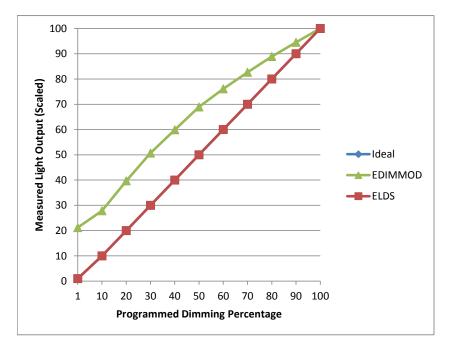

## **Observations:**

No flicker, stepping or other anomalies observed.

Also compatible with Vantage ELDS4-DIN.

## **Reverse-phase Voltage**

