


Manufacturer Feelux
Model HDV18-30K-24V / HDV6-30-24V
Description LED strip lighting
Driver Justin, Inc. 481-24DCR
Nominal Power (W) 18W / 6W
Dimming Control forward-phase
Product Range LED DIVA2
Test Date 8/26/2015

Dimmer Tested Against:	SDM12-EM		
Pass/Fail	Pass		
Best-Fit Power Profile:			
Minimum ON	6		
Maximum ON	31		
Adjust	85		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived), 120V	96.2%		
Minimum (Perceived)	7.9%		
Minimum (Measured)	0.6%		

Linearity Curves (Best-fit Power Profile Applied):

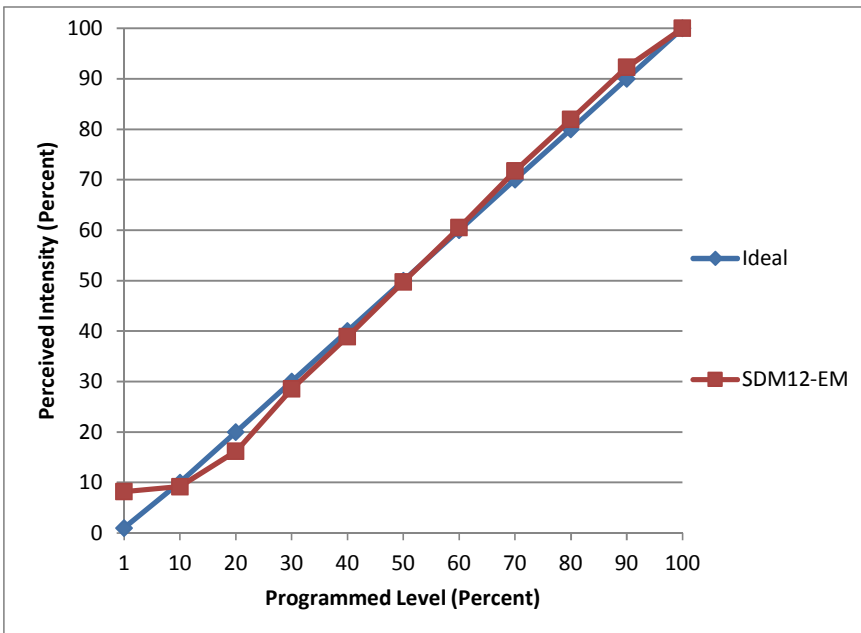

Observations: Mixing NDV and HDV products on a single power unit results in flicker.
 Not compatible with ScenePoint Dimmer.