ManufacturerFutura LightingModelUL-RBL-NWDescriptionTape Light

**Driver** FL-100W-12V-LED-DIM

Nominal Power (W) 24


**Dimming Control** Forward and Reverse

Product Range -

**Test Date** 5/16/2017

| Dimmer Tested Against:              | SDM12-EM | Scenepoint | UDM-FWD | UDM-REV |
|-------------------------------------|----------|------------|---------|---------|
| Pass/Fail                           | Pass     | Pass       | Pass    | Fail    |
| Best-Fit Power Profile:             |          |            |         |         |
| Minimum ON                          | 3        | 4          | 3       |         |
| Maximum ON                          | 81       | 84         | 85      |         |
| Adjust                              | 100      | 100        | 90      |         |
| Light Output Range (vs. non-dimmed) |          |            |         |         |
| Maximum (Perceived)                 | 95.3%    | 94.7%      | 95.8%   | 95.0%   |
| Minimum (Perceived)                 | 9.9%     | 11.4%      | 8.4%    | 1.0%    |
| Minimum (Measured)                  | 1.0%     | 1.3%       | 0.7%    | 0.0%    |

## Linearity Curves (Best-fit Power Profile Applied):

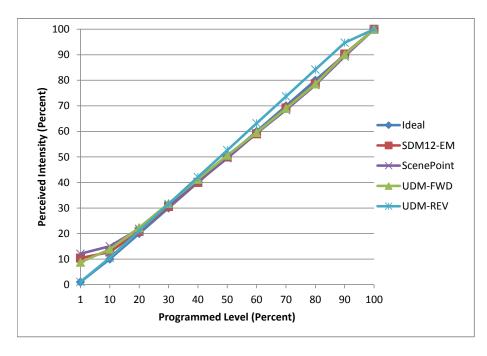

## **Observations:**