Manufacturer Halco

Model PAR30FL14S/830/W/LED

DescriptionPAR30S LampDriverintegrated

Nominal Power (W) 14.5


**Dimming Control** forward- and reverse-phase

Product Range ProLED

**Test Date** 5/8/2015

Dimmer Tested Against:	SDM12-EM	EDIMMOD	
Pass/Fail	Pass	Pass	
Best-Fit Power Profile:			
Minimum ON	1	0	
Maximum ON	92	90	
Adjust	100	100	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.4%	95.4%	
Minimum (Perceived)	0.8%	9.3%	
Minimum (Measured)	0.0%	0.9%	

## **Linearity Curves (Best-fit Power Profile Applied):**

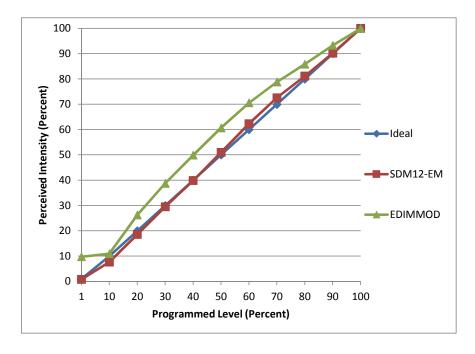

## **Observations:**