Manufacturer Kobi

ModelLED-100-R30-50DescriptionR30 LampDriverIntegrated

Nominal Power (W) 17


**Dimming Control** Forward and Reverse

Product Range -

**Test Date** 8/31/2016

Dimmer Tested Against:	SDM12-EM	Scenepoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Fail	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	3	1	4	4
Maximum ON	91	ı	92	93
Adjust	100	1	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.4%	95.0%	95.4%	95.4%
Minimum (Perceived)	9.8%	1.0%	13.1%	15.0%
Minimum (Measured)	1.0%	0.0%	1.7%	2.3%

## Linearity Curves (Best-fit Power Profile Applied):

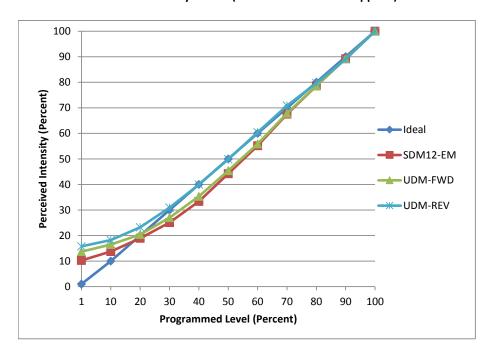

## **Observations:**