


Manufacturer LEDnovation
Model LED-PAR20-50-1WD-INFE
Description PAR20 LED Lamp
Driver Internal
Nominal Power (W) 6
Dimming Control Forward- and Reverse-Phase
Product Range
Test Date 12/5/2012

Dimmer Tested Against:	SDM12-EM	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Standard
Minimum ON	4	1	4
Maximum ON	76	60	
Adjust	65		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.3%	96.1%	100.0%
Minimum (Perceived)	1.2%	4.2%	1.2%
Minimum (Measured)	0.0%	0.2%	0.0%

Linearity Curves (Best-fit Power Profile Applied):

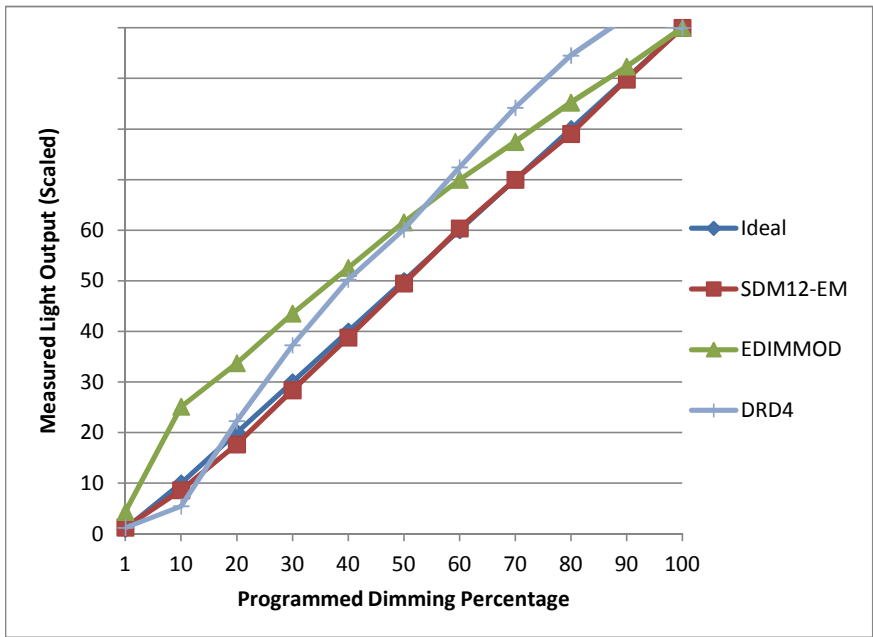

Observations: None

Forward-phase
100% Dim Level Waveform Capture



50% Dim Level Waveform Capture



Reverse-phase
100% Dim Level Waveform Capture



50% Dim Level Waveform Capture

