ManufacturerNo 8 LightingModel400 series

DescriptionAdjustable DownlightDriverISD-602-1000-15-D

Nominal Power (W) 15


Dimming Control Forward and Reverse

Product Range -

Test Date 7/12/2016

Dimmer Tested Against:	SDM12-EM	ScenePoint	UDM-FWD	UDM-REV
Pass/Fail	Pass	Pass	Pass	Pass
Best-Fit Power Profile:				
Minimum ON	7	9	11	12
Maximum ON	73	75	75	70
Adjust	100	100	100	100
Light Output Range (vs. non-dimmed)				
Maximum (Perceived)	95.2%	95.3%	95.3%	95.0%
Minimum (Perceived)	10.5%	17.8%	27.1%	34.9%
Minimum (Measured)	1.1%	3.2%	7.3%	12.2%

Linearity Curves (Best-fit Power Profile Applied):

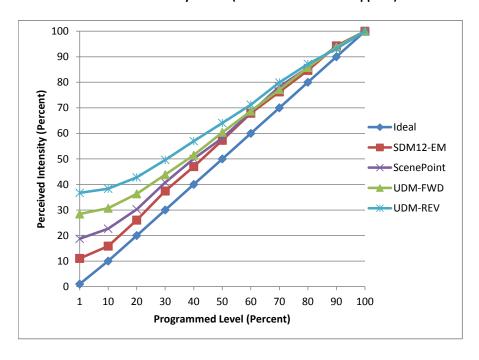

Observations: