
| Manufacturer | No 8 Lighting | | |
|-------------------|---------------------|--|--|
| Model | 800K series | | |
| Description | 2 in Downlight | | |
| Driver | ISD-602-700-23-D | | |
| Nominal Power (W) | 23 | | |
| Dimming Control | Forward and Reverse | | |
| Product Range | - | | |
| Test Date | 7/11/2016 | | |

| Dimmer Tested Against: | SDM12-EM | ScenePoint | UDM-FWD | UDM-REV |
|-------------------------------------|----------|------------|---------|---------|
| Pass/Fail | Pass | Pass | Pass | Pass |
| Best-Fit Power Profile: | | | | |
| Minimum ON | 7 | 7 | 7 | 9 |
| Maximum ON | 73 | 73 | 74 | 70 |
| Adjust | 100 | 100 | 100 | 100 |
| Light Output Range (vs. non-dimmed) | | | | |
| Maximum (Perceived) | 95.0% | 95.8% | 95.6% | 95.4% |
| Minimum (Perceived) | 17.9% | 13.9% | 16.3% | 29.8% |
| Minimum (Measured) | 3.2% | 1.9% | 2.6% | 8.9% |



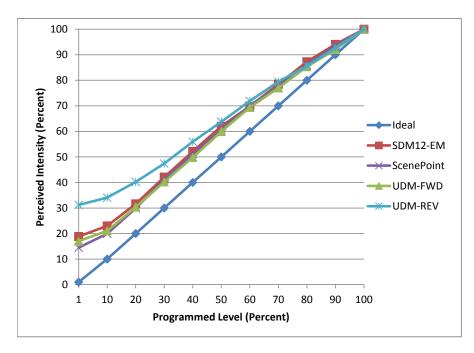

Observations:

bgk