ManufacturerSavage Marine LTDModelSan Remo ChanferDescriptionMarine downlightDriverprovided by SavageNominal Power (W)10


**Control Current** 

**Dimming Control** 0-10VDC

Product Range Rianna, Bermondsey
Test Date 4/7/2013

Dimmer Tested Against:	LVOS		
Pass/Fail	Pass		
Best-Fit Power Profile:			
Minimum ON	1	10	
Maximum ON	8.3		
Adjust	100		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	99.5%		
Minimum (Perceived)	33.2%		
Minimum (Measured)	11.1%		

## **Linearity Curves (Best-fit Power Profile Applied):**

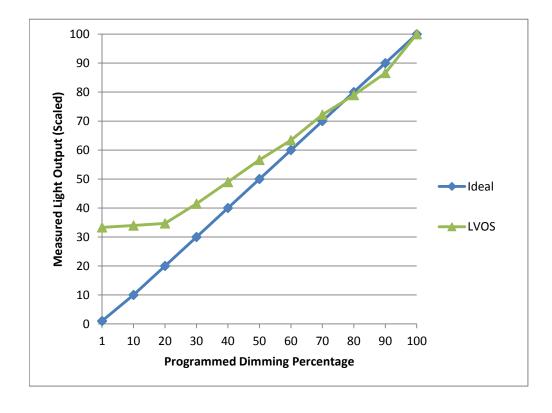

## **Observations:**

Some visible level stepping while ramping/fading.

When turned on to low levels, flashes bright momentarily before settling to

appropriate dimmed level.