Manufacturer Solais

Model LR20-25-30K-1000-WH

DescriptionLR20 LampDriverIntegrated

Nominal Power (W) 12


Dimming Control Forward and Reverse

Product Range -

Test Date 11/4/2016

| Dimmer Tested Against: | SDM12-EM | Scenepoint | UDM-FWD | UDM-REV |
|-------------------------------------|----------|------------|---------|---------|
| Pass/Fail | Pass | Pass | Pass | Pass |
| Best-Fit Power Profile: | | | | |
| Minimum ON | 16 | 18 | 17 | 17 |
| Maximum ON | 57 | 59 | 59 | 57 |
| Adjust | 90 | 85 | 85 | 85 |
| Light Output Range (vs. non-dimmed) | | | | |
| Maximum (Perceived) | 95.2% | 95.2% | 95.3% | 95.2% |
| Minimum (Perceived) | 11.2% | 4.8% | 4.9% | 5.6% |
| Minimum (Measured) | 1.3% | 0.2% | 0.2% | 0.3% |

Linearity Curves (Best-fit Power Profile Applied):

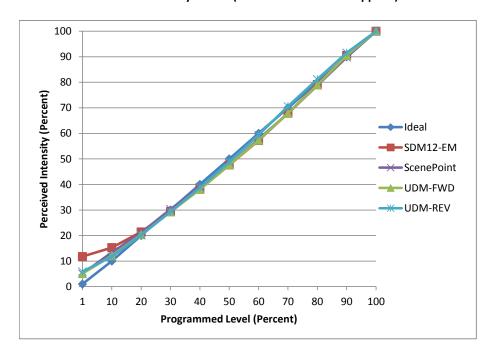

Observations:

Minimum of 3 lamps