Manufacturer Solais

ModelXd24-25-30K-2400-WH-JDescriptionXd24 Track lighting

Driver Integrated

Nominal Power (W) 28


Dimming Control Forward and Reverse

Product Range -

Test Date 11/14/2016

| Dimmer Tested Against: | SDM12-EM | Scenepoint | UDM-FWD | UDM-REV |
|-------------------------------------|----------|------------|---------|---------|
| Pass/Fail | Pass | Pass | Pass | Pass |
| Best-Fit Power Profile: | | | | |
| Minimum ON | 12 | 12 | 15 | 17 |
| Maximum ON | 85 | 85 | 85 | 86 |
| Adjust | 100 | 100 | 100 | 100 |
| Light Output Range (vs. non-dimmed) | | | | |
| Maximum (Perceived) | 96.1% | 95.2% | 95.8% | 95.7% |
| Minimum (Perceived) | 26.6% | 26.4% | 33.1% | 28.9% |
| Minimum (Measured) | 7.1% | 7.0% | 10.9% | 8.3% |

Linearity Curves (Best-fit Power Profile Applied):

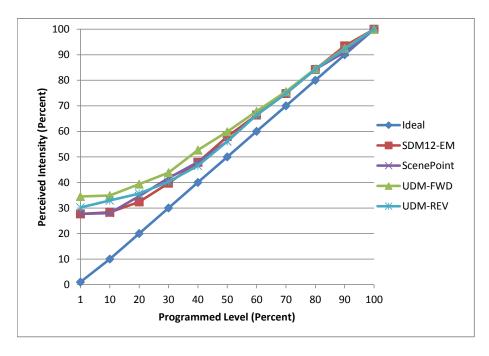

Observations: