


Manufacturer Tech Lighting
Model 351EN3LED3000
Description 3000k LED engine for 3" Entra downlights and wall washes
Driver ERP ESS020W-0450-42
Nominal Power (W) 12
Control Current -
Dimming Control 0-10v
Product Range Entra - LED engine
Test Date 15 January, 2021

Dimmer Tested Against:	0-10v
Commercial Pass/Fail	Pass
Residential Pass/Fail	Pass
Best-Fit Power Profile:	
Minimum ON	0.25
Maximum ON	6.95
Adjust	100
Light Output Range (vs. non-dimmed)	
Maximum (Perceived)	94.7%
Minimum (Perceived)	14.0%
Minimum (Measured)	2.0%

Linearity Curves (Best-fit Power Profile Applied):

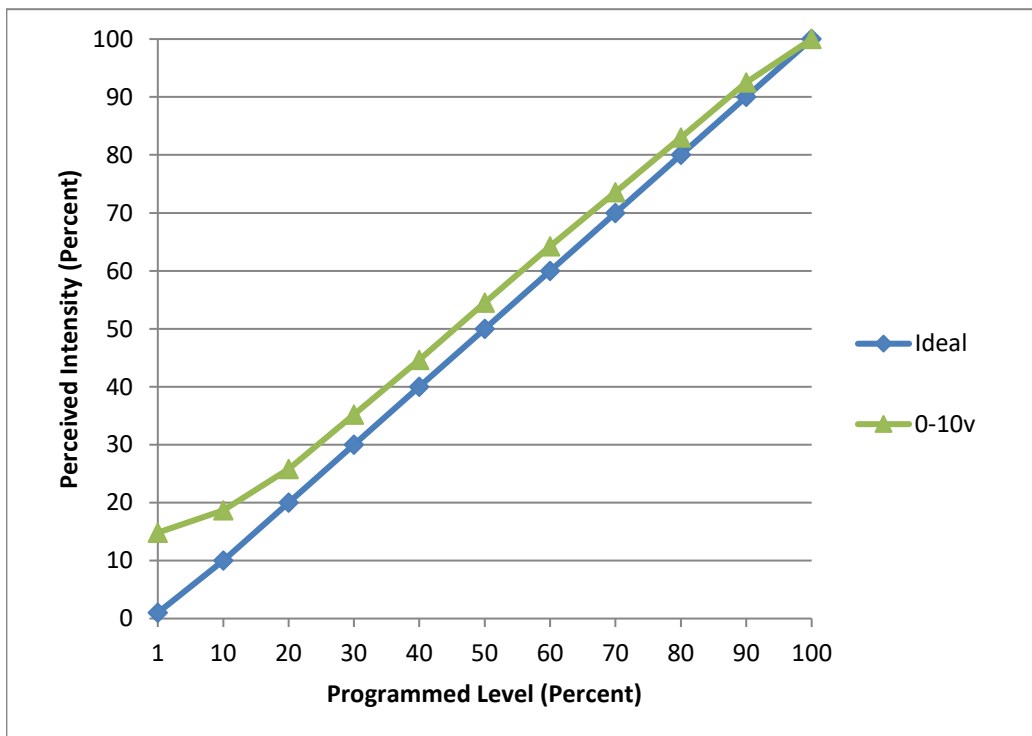

jwm

Observations: Test performed in three unit configuration.