Manufacturer Utilitech

ModelDLS02-06A27D1E-WH-F2Description6" Recessed Retrofit Downlight

Driver JW02-013-047-I-N Nominal Power (W) 13


Dimming Control Forward- and reverse-phase

Product Range

Test Date 10/2/2015

Dimmer Tested Against:	SDM12-EM	EDIMMOD	
Pass/Fail	Pass	Pass	
Best-Fit Power Profile:			
Minimum ON	10	4	
Maximum ON	85	80	
Adjust	50	80	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.4%	95.9%	
Minimum (Perceived)	13.8%	13.3%	
Minimum (Measured)	1.9%	1.8%	

Linearity Curves (Best-fit Power Profile Applied):

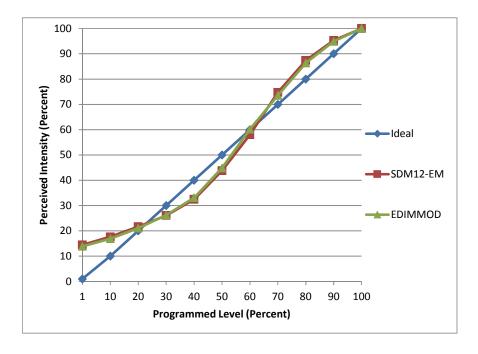

Observations:

directionally dependent light output - values given are averages