
| Manufacturer | Liteline | | | |
|-------------------|--------------------------|--|--|--|
| Model | LED-TP1-12-WW | | | |
| Description | Indoor Tape Light | | | |
| Driver | Lutron LED-HWBDIM2-24-40 | | | |
| Nominal Power (W) | 1.3 | | | |
| Dimming Control | Forward and Reverse | | | |
| Product Range | | | | |
| Test Date | 6/9/2016 | | | |

| Dimmer Tested Against: | SDM12-EM | ScenePoint | UDM-FWD | UDM-REV |
|-------------------------------------|----------|------------|---------|---------|
| Pass/Fail | Pass | Pass | Pass | Pass |
| Best-Fit Power Profile: | | | | |
| Minimum ON | 5 | 7 | 7 | 10 |
| Maximum ON | 84 | 85 | 85 | 81 |
| Adjust | -50 | -50 | -50 | -25 |
| Light Output Range (vs. non-dimmed) | | | | |
| Maximum (Perceived) | 96.1% | 96.4% | 95.6% | 95.5% |
| Minimum (Perceived) | 10.5% | 10.5% | 10.4% | 10.5% |
| Minimum (Measured) | 1.1% | 1.1% | 1.1% | 1.1% |

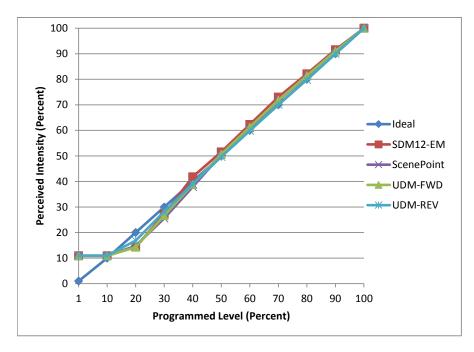

Linearity Curves (Best-fit Power Profile Applied):

Observations:

Light changes as it warms up

bgk